
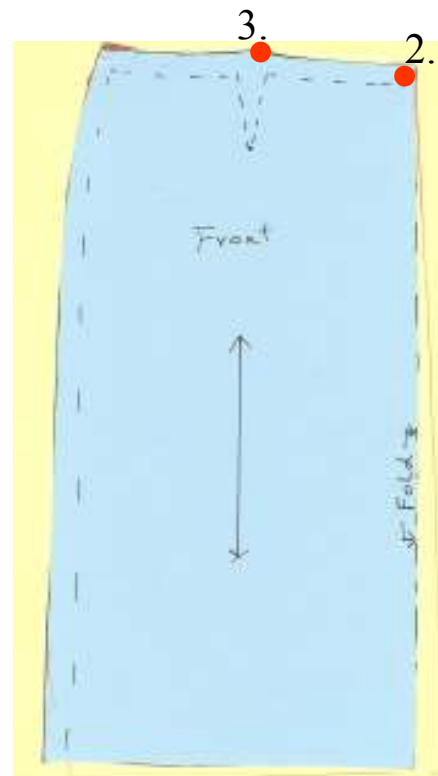
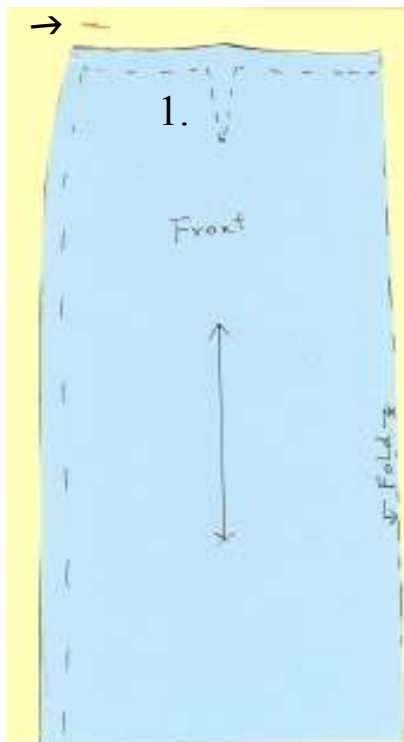



High hip adjustment:

High hip usually needs height plus width.

- Measure distance of each side from upper hip line.
- Make note of which hip is high.

1. Mark height on tissue.
2. For hip height and fullness pivot from center point at waist.
3. For only height and not extra fullness pivot at dart.

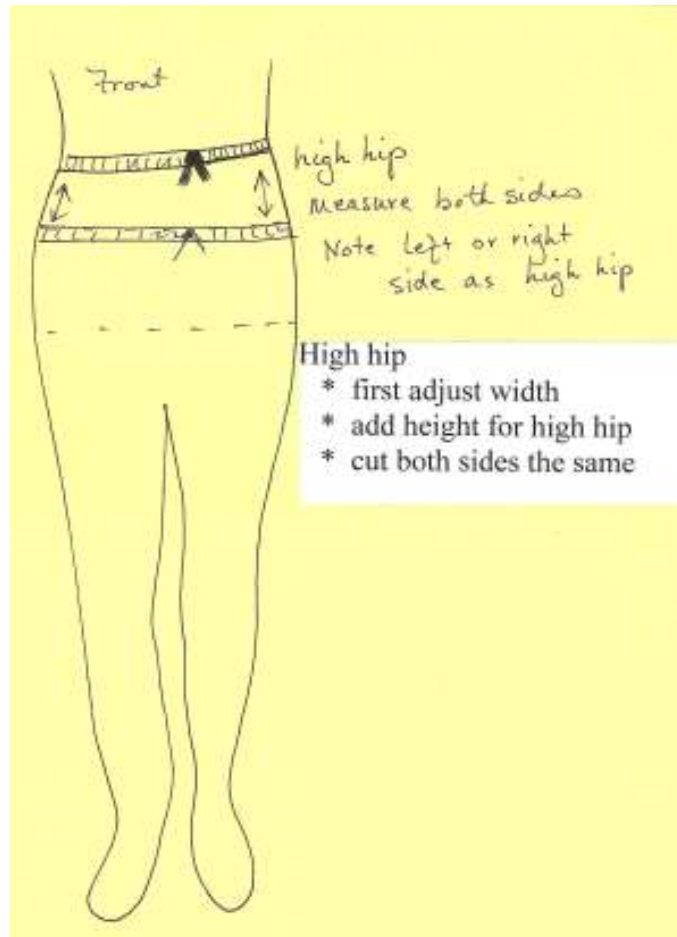


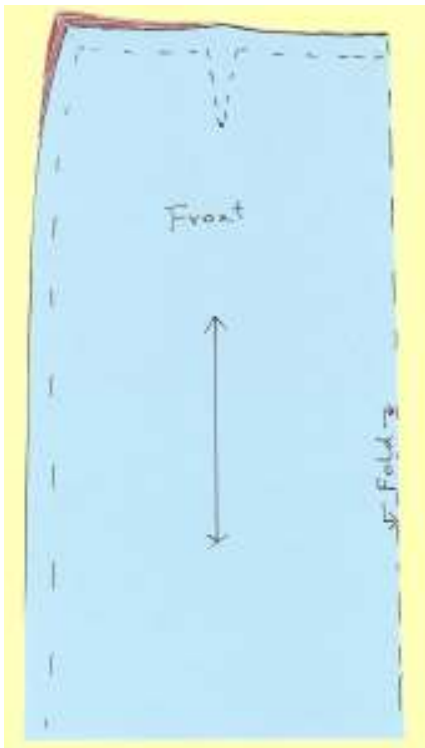

- Cut pattern on fold (both sides with high hip).



- Open fabric and with WRONG side facing you trim the regular hip side by placing original pattern on fabric and follow hip-line.

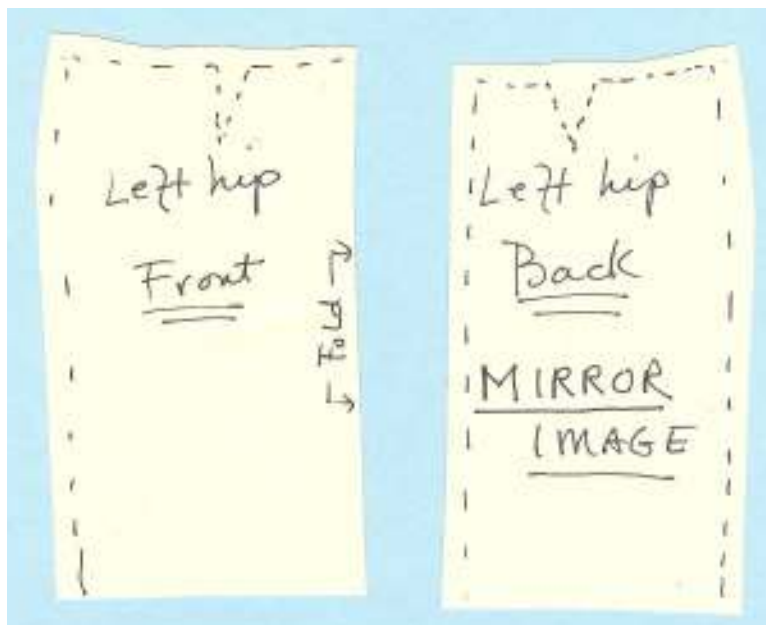

- Back pattern piece must match same hip as front pattern. (This is easy to mix up) The back hip adjusted side will be the mirror image of front. When cutting fabric cut with right side facing up.